


Ultra-thin flexible broadband Absorber (2-30 GHz)

Code for ordering: TXT230

Features:

- ✓ Attenuation performance up to -10 dB throughout the band (90% absorption).
- ✓ 0.3 mm thickness
- ✓ Compliant with RoHS standards, ensuring user safety.
- ✓ Fire-resistant coating in accordance with NRL 8093, categories 1, 2, and 3.
- ✓ Designed for a long service life of up to 15 years.
- ✓ Reflectivity verified using the NRL Arch technique (IEEE 1128-1998).
- ✓ Installation options include bonding with neoprene adhesive, Velcro attachment, or other methods specified by the user.
- ✓ Size $420 \times 280 \text{ mm}^2$ (Higher or lower size is available as per the requirements)

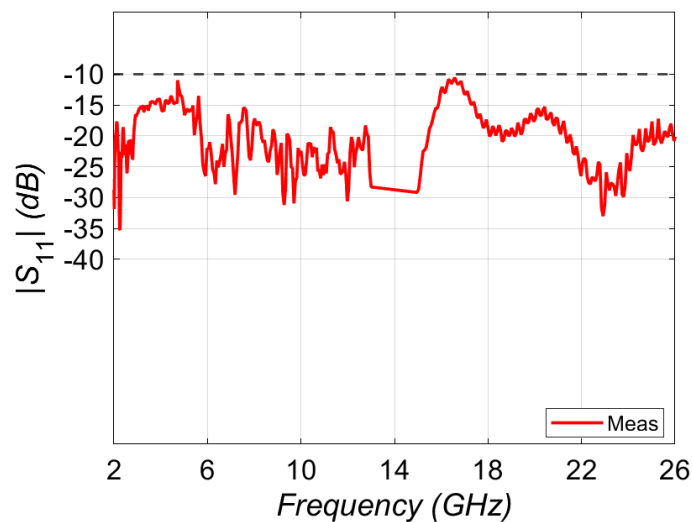

Puri Amanvilas Rd, Sector 89 Faridabad, Haryana 121002, India Contact: ajitsingh107@gmail.com,
mobile number: +919811901477